Postprocessing of 2D FEATFLOW Data with the Particle Tracing Tool GMVPT (Version 1.1)

J.F.Acker, S.Turek
Institut für Angewandte Mathematik, Universität Heidelberg
Im Neuenheimer Feld 294, 69120 Heidelberg, Germany
Email: featflow@featflow.de
Homepage: http://www.featflow.de

31st August 1999

Contents

1 How to start ? 1
1.1 Installation . . . 1
1.2 Directory structure . . . 2
1.3 Syntax of the configuration file `gmvpt.dat` . . . 2
1.4 A short examplary configuration file . . . 2
1.5 Moving boundaries . . . 3
1.6 Example include files . . . 3
1.7 Usage . . . 4

2 Visualisation of particles using GMV 4
2.1 Preparations . . . 4
2.2 The tracers menu . . . 4
2.3 The polygons menu . . . 4
2.4 The timestamp . . . 6
2.5 Generating MPEG videos with GMV . . . 6

3 Examples 6
3.1 Flow around a cylinder . . . 6
3.2 Leapfrogging of smoke rings ('Puff-Puff' problem) . . . 7
3.3 Moving boundary example ('Rotor' problem) . . . 7

4 Outlook 7

1 How to start ?

1.1 Installation

First you have to copy the source files `gmvpt.c` and `movbc.inc` (which are downloadable from our homepage) into the same directory where e.g. the FEATFLOW simulation tools `pp2d` or `cc2d` are located. Then you have to compile the source code with your preferred C-compiler, e.g. `gcc`:

gcc -O3 -lm -o gmvpt gmvpt.c

If you use `bouss`, that means the modified version of `pp2d` including temperature, you have to do the following variant:

gcc -O3 -lm -DBOUSS -o gmvpt gmvpt.c

If you work with moving boundaries (`cc2d_movbc`) you have to add the Switch "**-DMOVBC**" and edit the file `movbc.inc`, too. If you have modified the output-routines in FEATFLOW or if you want to apply GMVPT for other GMV data not created by FEATFLOW, make the corresponding modifications of `gmvpt.c`.

1.2 Directory structure

You need the following directories and files to successfully run GMVPT:

1. A coarse mesh `#gmv/coarse.gmv` and refined meshes `#gmv/tria*.gmv`, e.g. generated by invoking `trigen2d` (see [1]), with the finest mesh exactly the same as the mesh written into your simulation data files. These are needed to visualize the domain and to initialize the hierarchical search structures.

2. Data files `#gmv/u.*.gmv`, e.g. generated by `bouss`, `cc2d` or `pp2d`. GMVPT scans automatically for its input files, starting the search at `#gmv/u.1.gmv`.

3. A configuration file `#data/gmvpt.dat`.

1.3 Syntax of the configuration file `gmvpt.dat`

The configuration file is only a bunch of integer and floation points values. Linebreaks and blanks between those numbers are ignored. It's up to you to make it readable by inserting some linebreaks and blanks.
Unsigned integer values are preceeded by '#'. Everything else is a **floating point** value.

> <#Number of time steps> <Duration of a single time step for particle tracing> <#Read next input file after this number of time steps> <#Write next tracer file after this number of time steps>
>
> <#Number of Blocks>

Each mxn block of (starting) tracers with lower left corner (x1,y1) and upper right corner (x2,y2) is given by:

> <x1> <y1> <x2> <y2> <#n> <#m> <#Insert this block after this number of time steps (frequency)> <#Subtract this offset to the number of time steps (phase change)> <#First time step> <#Last time step> <Value of data field 'Farbe'> <Remove particles after this time (lifetime)>

1.4 A short examplary configuration file

```
1000 0.05 2 2
2
0.0 0.0 0.1 0.1 10 10 4 0 0 999 0.0 25.0
0.0 0.0 0.1 0.1 10 10 4 1 0 999 1.0 25.0
```

This sample file makes 1000 micro time steps with duration 0.05. Every second time step it reads a new input file and writes a new tracer file (be sure to have enough input files!). This implicitly requires that the time step in the simulation process to output the data was 0.1. There are two blocks located at (0.0,0.0)-(0.1,0.1) with a 10x10 grid of tracers. Each tracer exists for 25 seconds. Both blocks are inserted each fourth (micro) time step, but the second has a phase change. The

effect is that tracers with color 0.0 are inserted at time steps 0,4,8,12,... and tracers with color 1.0 are inserted at time steps 1,5,9,13,... (if (i-1) mod 4 = 0 is true for time step i). To adjoin real colors to these values you have to modify the data limits of tracer field `Farbe` and to adjust the colormap to your needs. It will generate output files named `t.1.gmv`, `t.2.gmv`, ..., `t.500.gmv` (prefix 't' by default). For making particle tracing with stationary data (GMVPT looks for the first `u.i.gmv` file!) set the third value (Read next input file after this number of time steps) higher than the first value (Number of time steps).

1.5 Moving boundaries

Moving boundaries are implemented analytically by calling an user defined test function with node or tracer coordinates. If a tracer hits the moving boundary, it is deleted. For each node inside this moving boundary, a small quadratic polygon in our tracer files is generated. This test function is located inside the source file `movbc.inc`.

1.6 Example include files

By default, the test function `Test_MovBC` returns an integer value 0.

```
int Test_MovBC(Daten_Typ K[DIM]) { return 0; }
```

This results in no moving boundary at all. The location of the point, which should be tested, is stored in the array parameter here called `K`. The next include file gives the more advanced case of a rotating cross-shape boundary located in the origin.

```
#include <math.h>
int Test_MovBC(Daten_Typ K[DIM])
{
const Daten_Typ drad=0.25;
const Daten_Typ deps=0.05;
const Daten_Typ dvel=M_PI;
Daten_Typ phi1,phi2,phi3,phi4,phi5,phi6=0.0,phi7=0.0;
Daten_Typ phi1d,phi2d,dist1,dist2,drad2;

phi1=Global_Time*dvel;
phi2=phi1+M_PI*0.5;
phi3=phi2+M_PI*0.5;
phi4=phi3+M_PI*0.5;
drad2=sqrt(K[0]*K[0]+K[1]*K[1]);
if (drad2<=drad)
{
phi5=acos(K[0]/drad2);
if (K[1]<0.0) phi5=2.0*M_PI-phi5;
while(phi5<phi1) phi5+=2.0*M_PI;
if ((phi5>=phi1)&&(phi5<=phi2))
{
phi6=phi1;
phi7=phi2;
}
if ((phi5>=phi2)&&(phi5<=phi3))
{
phi6=phi2;
phi7=phi3;
}
if ((phi5>=phi3)&&(phi5<=phi4))
```

```
{
phi6=phi3;
phi7=phi4;
}
if (phi5>=phi4)
{
phi6=phi4;
phi7=phi1;
}
phi1d=phi5-phi6;
phi2d=phi7-phi5;
dist1=drad2*sin(phi1d);
dist2=drad2*sin(phi2d);
if ((fabs(dist1)<=deps)||(fabs(dist2)<=deps)) return 1;
}
return 0;
}
```

1.7 Usage

Go to the directory, where the subdirectories `#gmv` and `#data` are located and start GMVPT with

gmvpt [<prefix>]

The optional parameter <prefix> is per default 't' and gives the leading string of the filenames of your generated tracer files. These names are constructed by '<prefix>.<#filenumber>.gmv'.

2 Visualisation of particles using GMV

2.1 Preparations

After starting GMV (see also [5]), open the cells menu at `Display/Cells`. Then deactivate `Faces` and activate `Edges`. Adjust also magnification, line color and line width to get a proper display of the underlying coarse mesh.

2.2 The tracers menu

Open the tracers menu at `Display/Tracers`. There you can activate different representations of tracers. Normally choose `Regular Points`. You can also choose between different data fields which determine, together with the color map and actual data limits, the color of each tracer/particle (see Fig. 1). Open the specific data limits menu at `Controls-1/Data Limits/Tracers`. There you can explicitly specify data limits for each data field. If you activate `Auto Reset` or `Auto Reset All`, for each single input file and for selected or all data fields, GMV calculates actual data limits. Turn off the color bar if you want to make an animation, since GMV would normally change in every frame such that it becomes unreadable (see Fig. 2).

2.3 The polygons menu

Open the polygons menu at `Display/Polygons` (see Fig. 3). With `shaded` and `lines`, you can toggle determine the display of the interior and the outline of all included polygons in our tracer files, marking the nodes inside of our moving boundary. To change the color of our polygons, you have to edit the color of material number 2 at `Controls-1/Coloredit/Materials, Isosurfaces, Isovolume`.

Figure 1: Tracers Menu

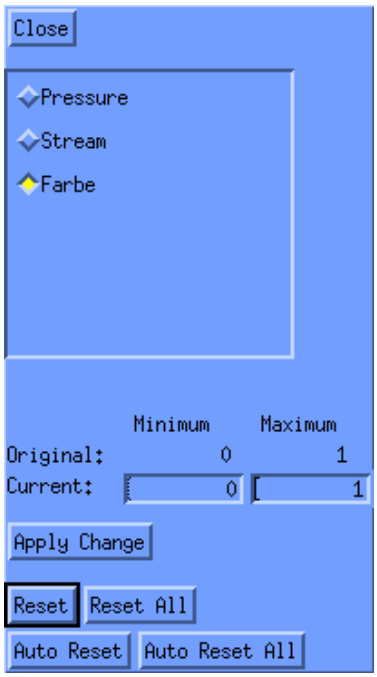

Figure 2: Set Tracers Limits Menu

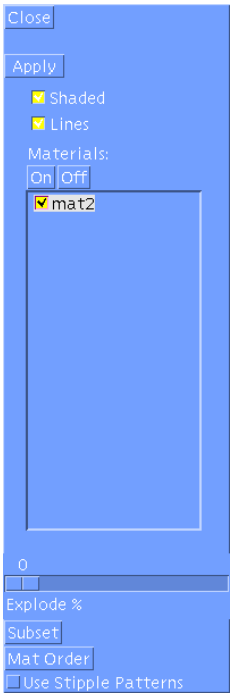

Figure 3: The Polygons Menu

2.4 The timestamp

GMVPT inserts the global time of your particle tracing as timestamp in the tracer files. By default, this time is displayed in the right upper corner of the visualization. You can toggle the display of that timestamp at `Controls-2/Time`.

2.5 Generating MPEG videos with GMV

First load one of your generated `t.*.gmv` files. Adjust GMV to get the desired visualisation of your tracers and create an attribute file `test.attr` with `Files/Put Attributes`. Then further steps depend on which tools you want to use (e.g. image size 640x480, number of frames 250, name of MPEG will be `test.mpeg`):

- MKYUV/MKMPEG (see [2]):
  1. Replace every 'u.' by 't.' in the file `mkyuv.c` and recompile `mkyuv`.
  2. Invoke MKYUV with `mkyuv 640 480 test.attr test 1 250`.
  3. Invoke MKMPEG with `mkmpeg 640 480 test 250`.
- GMVMPEG (see [4]):

  Invoke GMVMPEG with `gmvmpeg -a test.attr -x 640 -y 480 -fls 1,250,1 -o test`. If you have installed the virtual framebuffer Xvfb, you can add the option '-I' to avoid annoying popups by GMV.

3 Examples

3.1 Flow around a cylinder

The problem here is to visualize the vortex shedding behind a cylinder. We continuously insert a rectangular area of tracers with a constant frequency to simulate a constant stream of particles.

Between each frame we make ten interpolating time steps (if each input file has time difference 0.025, you have to ensure that time step is 0.025/10=0.0025, to be synchronous with the simulation). An examplary configuration file looks like the following (see Fig. 4 for its output).

```
2500 0.0025 10 10
1
0.0 0.175 0.1 0.225 10 5 27 0 0 2499 0.0 2.5
```

3.2 Leapfrogging of smoke rings ('Puff-Puff' problem)

Here the problem is to visualize two smoke rings chasing each other. It's nearly impossible to visualize this flow configuration without particle tracing! We insert a squared 100x100 block of 10,000 particles located at (4.3,4.4)-(4.5,4.6) at times 0.0 and 120*0.03333333334=4.0 with different colors (0.0 represents blue, 1.0 represents red in the default color map, if we use a value range of 0.0-1.0 for data field 'Farbe'). Each input file corresponds to a time step of 0.1. Thus we make three interpolating time steps between the input files and due to the 500 input files, we have to use a time step of about 0.1/3=0.033333... and we make 500*3=1500 time steps. An examplary configuration file is shown below in this text (see Fig. 5 for its output).

```
1500 0.03333333334 3 3
2
4.3 4.4 4.5 4.6 100 100 1 0 0 0 0.0 50.1
4.3 4.4 4.5 4.6 100 100 1 0 120 120 1.0 50.1
```

3.3 Moving boundary example ('Rotor' problem)

Here is the problem to visualize a rotating cross-shaped boundary inside a quadratic box with inflow at the middle of the right boundary and outflow at the middle of the top, left and bottom boundary. Each input file corresponds to a timestep of 0.01. The timestep between each tracer file is 0.1. To visualize the flow, each 0.02 sec. are 201 new particles placed along a streak line at the outer right boundary. An examplary configuration file is shown below in this text (see Fig. 6 for its output).

```
160 0.005 2 20
1
0.299 -0.1 0.299 0.1 1 201 4 0 0  2000 0.0 100.1
```

4 Outlook

GMVPT 1.1 is only the second **complete** version with a rich variety of configurations for particle tracing as postprocessing tool. At the moment, the process of building hierarchical search structures is included, in contrast to version 1.0 such that GMVPT 1.1 is much faster.
Additionally, the following improvements for the next version are planned:

1. Improved interpolation (for different FEM spaces).
2. Adaptive time steps.
3. **The 3D variant! (experimental feature, activate with switch "-DPART3D")**

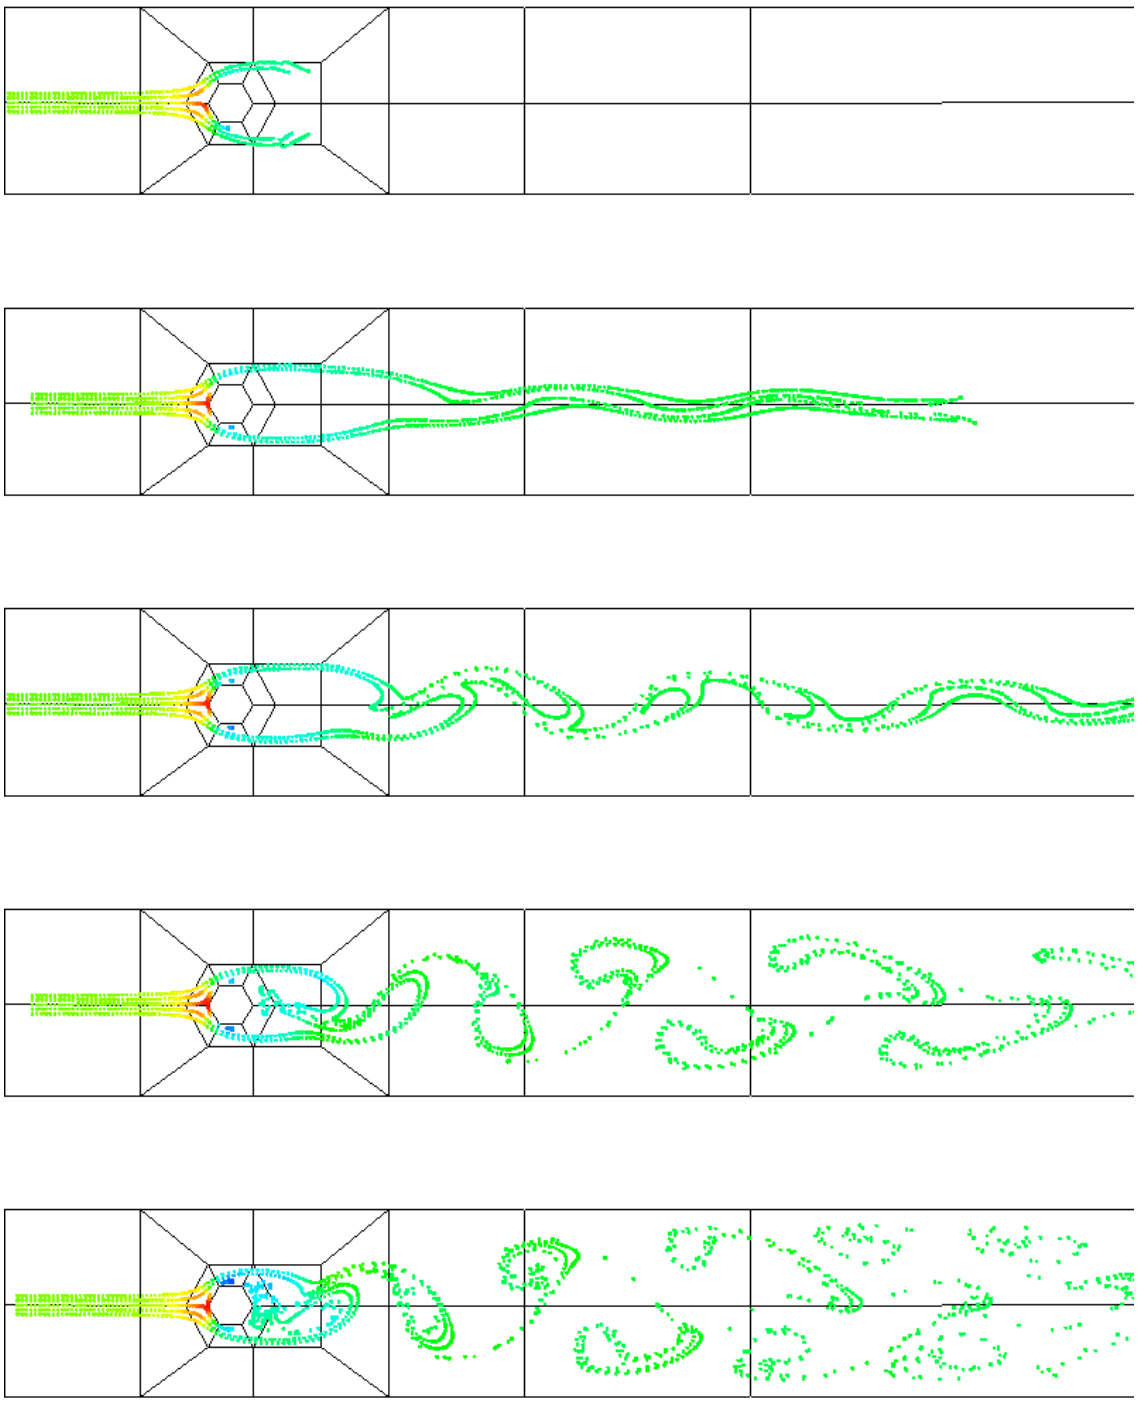

Figure 4: Vortex shedding behind a cylinder visualized by a particle stream

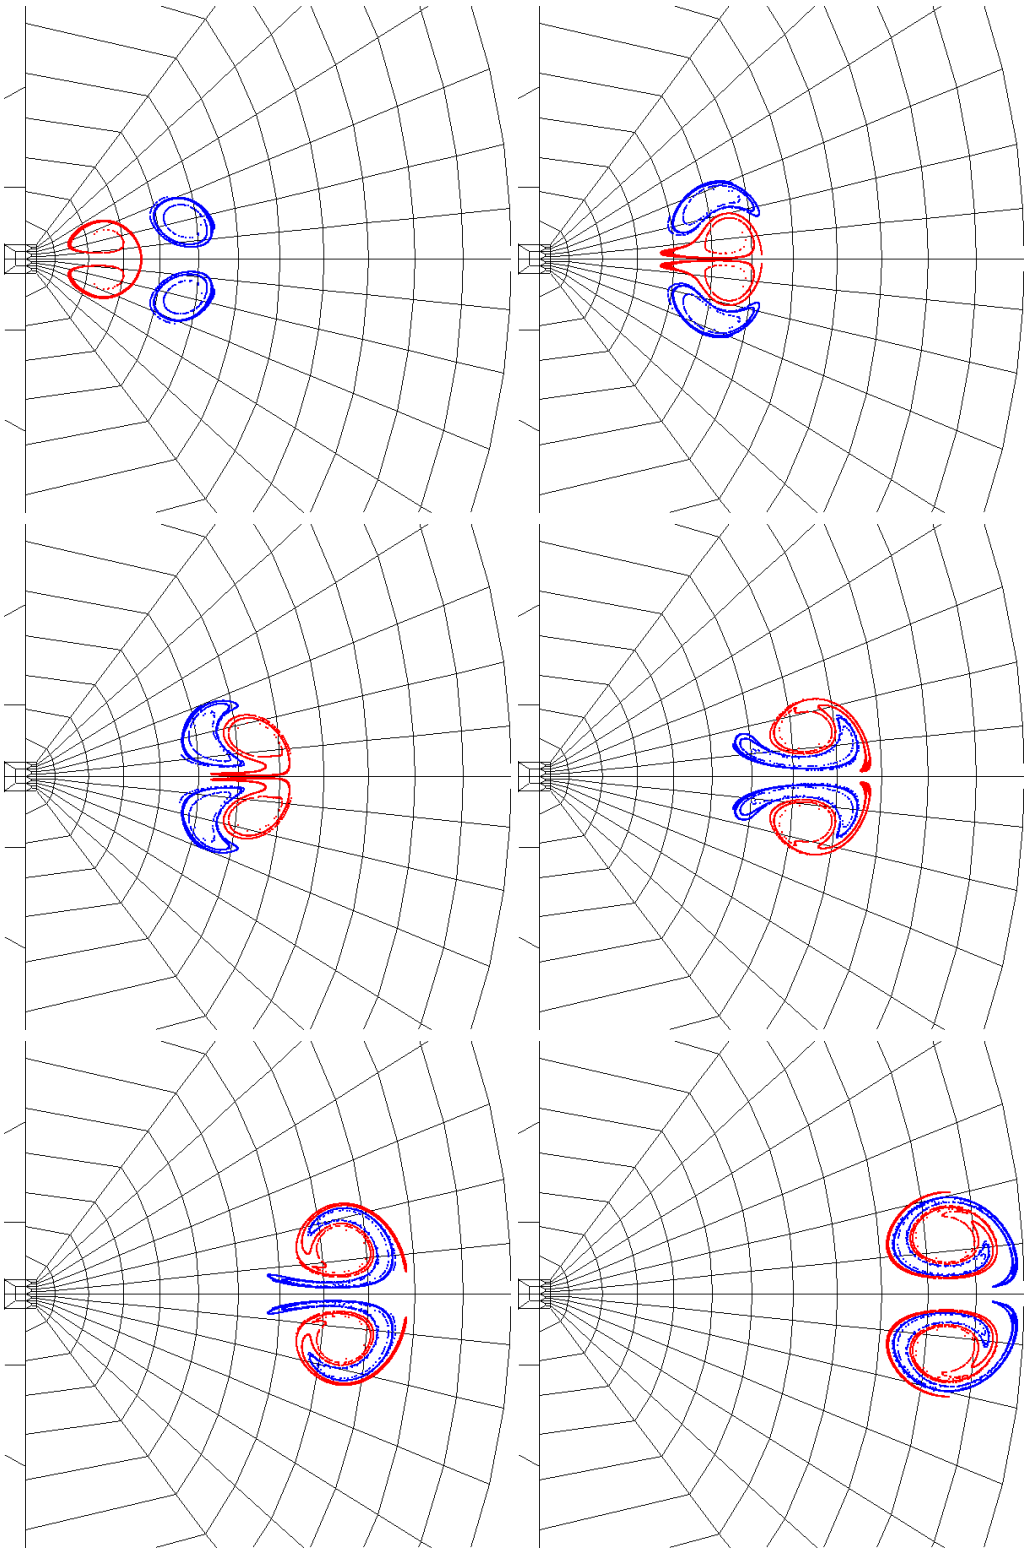

Figure 5: Two smoke rings chasing each other

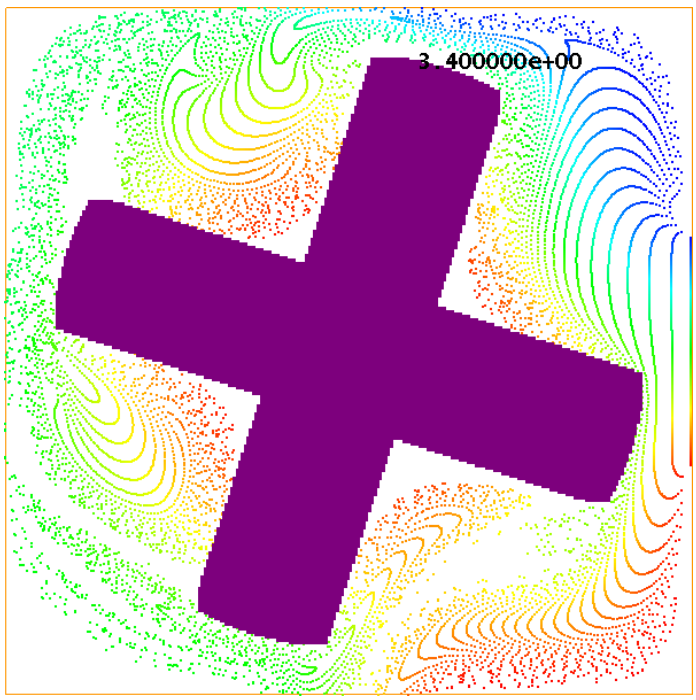

Figure 6: Flow around a moving rotor with streak lines

References

[1] ***FEATFLOW***. *Finite element software for the incompressible Navier-Stokes equations: User Manual. Release 1.1*, 1998

[2] J. F. Acker, S. Turek: *Arbeiten mit* ***GMV*** *unter* ***FEATFLOW***, Preprint 98–50, U Heidelberg, SFB 359, 1998

[3] J. F. Acker, S. Turek: *3D presentation of* ***FEATFLOW*** *data with* ***GMV***, Preprint 99–19, U Heidelberg, SFB 359, 1999

[4] S. Buijssen, S. Turek: *Batch-oriented* ***MPEG*** *generation with* ***GMV*** *in background mode*, Preprint 99–29, U Heidelberg, SFB 359, 1999

[5] ***GMV*** *(**G**eneral **M**esh **V**iewer) user manual. Release 1.8*, 1999 (see also: *http://www-xdiv.lanl.gov/XCM/gmv/GMVHome.html*)

See also *http://www.featflow.de* for downloads of our documentations and preprints.